



Installing the Flat Grinder Disk on the Diamond Max 2 in 1 Grinder



To reinstall the disk support collar after applying anti-sieze lubricant, align the flat surface of the shaft with the collar hex screw and slide all the way to the bottom of the shaft. Tighten hex nut.

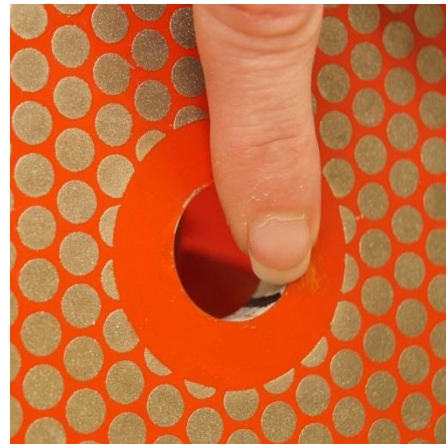

Locate the pin on the disk support collar and the hole on the bottom side of the diamond disk. Align the pin to fit in the hole - there's a line on the inside of the hole of the disk to make it easier to find the proper placement of the disk.

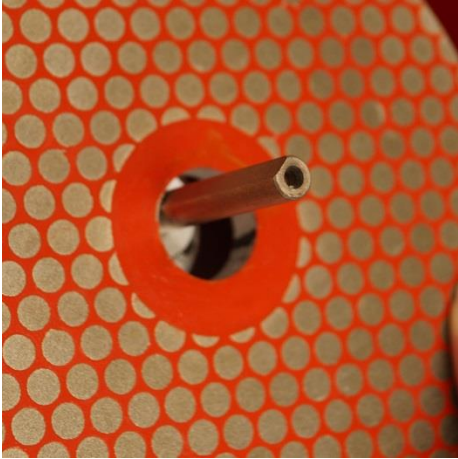

Push the disk down firmly to minimize and secure by threading the disk retaining nut onto the collar.

Delphi Tip: To improve lubrication on your flat grinder disk up you can enlarge the holes on the Slide Valve or for even better lubrication, we recommend adding the Max Splash™ Sheild and Water Bottle (Item #7377)

